

TITLE

~~POLYMERIC ACTUATORS AND PROCESS FOR PRODUCING THE SAME~~ ^{POLYMERIC ACTUATORS}

FIELD OF THE INVENTION

5 The present invention relates to novel polymeric actuators and a process for producing the same. More particularly, the invention relates to polymeric actuators functioning as actuators by bending or deforming ion-exchange resin products and to a process
10 for producing the polymeric actuators.

BACKGROUND OF THE INVENTION

15 Recently, there is an enhanced demand for a miniaturized, lightweight and highly flexible actuator in the fields of medical equipment, industrial robots, micromachines and the like.

20 When the actuator is thus miniaturized, the friction and viscous force are dominant over the inertial force. Therefore, it has been difficult to employ the means for converting energy to motion with the use of inertial force, such as a motor or an engine, as the power source of a microactuator. Accordingly, the operating principles based on electrostatic attraction, piezoelectricity, ultrasonic wave, shape

09253638 021999

memory alloy and polymer expansion/contraction have been proposed for the microactuator.

The actuator of the electrostatic attraction type operates by attracting, for example, a plate or rod becoming an electrode toward a counter electrode, and, for example, one which bends an electrode by applying a voltage of about 100 V between the electrode and the counter electrode disposed with a spacing of about tens of microns is known. The piezoelectric actuator operates by applying a voltage of some volts to a piezoelectric element of a ceramic such as barium titanate so that the element is expanded and contracted, and one capable of controlling a nm-unit displacement is known. The ultrasonic actuator operates by combining frictional force with the ultrasonic vibration generated by the piezoelectric element or the like, or by effecting a runoff. The actuator of the shape memory alloy type operates by temperature change with the use of the marked change of the configuration of the shape memory alloy depending on temperature. The actuator of the polymer expansion/contraction type operates with the use of the expansion/contraction of the polymer depending on the temperature or change of pH and change of the concentration of environmental chemical substance.

However, these microactuators have drawbacks in that there is restriction in their respective operation environments, the response is unsatisfactory, the structure is complicated and the flexibility is poor.

5 For example, for the operation of the actuator of the polymer expansion/contraction type, the solution in contact with the polymer must be replaced by the solution containing other salt. Therefore, it has been difficult to employ this actuator in the use requiring a
10 small size and a rapid response.

In contrast, an actuator element comprising an ion-exchange membrane and electrodes coupled to surfaces of the ion-exchange membrane and adapted to apply a potential difference to the ion-exchange membrane in the
15 hydrous state so that the ion-exchange membrane is curved or deformed has been proposed as one which can be easily miniaturized, realizes rapid response and operates with small electric power (see Japanese Patent Laid-open Publication No. 4(1992)-275078).

20 This actuator element is characterized by comprising an ion-exchange resin membrane (ion-exchange resin molding) and metal electrodes coupled to surfaces thereof in mutually insulating relationship and by being adapted to apply a potential difference between the
25 metal electrodes while the ion-exchange resin membrane

is in the hydrous state so that the ion-exchange resin membrane is curved or deformed.

In this actuator element, the electrodes are formed on the surfaces of the ion-exchange resin molding by chemical plating, electroplating, vacuum deposition, sputtering, coating, press bonding, fusion bonding or other methods. For example, the conventional process for forming the electrodes by the chemical plating includes a process comprising subjecting the ion-exchange membrane to etching of the surfaces thereof, bearing of a plating catalyst and immersion in a plating bath, thereby to form electrodes on the surfaces of the ion-exchange membrane and a process comprising ^{the} steps of making the surfaces of the ion-exchange resin membrane to adsorb a metal complex, followed by reducing the adsorbed complex, and then immersing the ion-exchange resin membrane in a plating bath to form the electrodes on the surfaces of the ion-exchange membrane.

However, the actuator element having the electrodes formed by the above methods has a drawback in that the displacement level is not satisfactory. In the conventional polymeric actuator, further, when the voltage applied between the electrodes is increased to obtain larger displacement and better response, water in

the ion-exchange resin membrane is easily electrolyzed, and therefore bubbles are easily produced.

a

~~OBJECT OF THE INVENTION~~

5 The present invention is intended to solve such problems associated with the prior art as mentioned above, and it is an object of the invention to provide an actuator element capable of generating large displacement, having rapid response and high
10 flexibility, having simple structure and capable of being easily miniaturized, and a process for producing the same. It is another object of the present invention to provide a polymeric actuator free from occurrence of bubbles due to electrolysis of water when a potential
15 difference is applied.

SUMMARY OF THE INVENTION

20 The process for producing a polymeric actuator according to the present invention is a process for producing a polymeric actuator comprising an ion-exchange resin product and metal electrodes which are formed on the surface of the ion-exchange resin product and are insulated from each other, said polymeric actuator operating as an actuator by applying a
25 potential difference between the metal electrodes when

the ion-exchange resin product is in the water-containing state to allow the ion-exchange resin product to undergo bending or deformation,

wherein the following steps (i) to (iii) are repeatedly conducted to form the metal electrodes ranging from the surface of the ion-exchange resin product to the inside thereof;

(i) a step of allowing the ion-exchange resin product to adsorb a metal complex in an aqueous solution (adsorption step),

(ii) a step of reducing the metal complex adsorbed on the ion-exchange resin product by a reducing agent to deposit a metal on the surface of the ion-exchange resin product (deposition step), and

(iii) a step of washing the ion-exchange resin product having the deposited metal (washing step).

By virtue of the method to form metal electrodes through the above steps, metal deposition further proceeds to the interior of the ion-exchange resin product to increase the contact area between the ion-exchange resin product and the metal electrodes, whereby the number of electrode active spots is increased to thereby increase the quantity of ions which migrate to a negative electrode. In the polymeric actuator, water molecules accompanying the ions migrate to a negative

electrode so that the water content in the vicinity of
said electrode is decreased to thereby expand the
negative electrode side of the resin product, while the
water content in the vicinity of the positive electrode
5 is decreased to thereby contract the positive electrode
side of the resin product. Accordingly, when the
quantity of ions which migrate to an electrode is
increased, the quantity of water molecules which migrate
to the electrode together with the ions is also
10 increased. As a result, the difference in the water
content between the vicinity of the negative electrode
and the vicinity of the positive electrode becomes
larger, and the degree of bending (deformation), namely,
degree of displacement, is increased. Further, since
15 the thickness of the metal electrode is increased, the
surface resistance of the electrode is decreased to
raise conductivity of the electrode.

According to the process of the invention,
therefore, a polymeric actuator having simple structure,
20 capable of being easily miniaturized, showing quick
response and capable of generating large displacement
can be obtained.


The polymeric actuator according to the present
invention comprises an ion-exchange resin product and
25 metal electrodes which are formed on the surface of the

ion-exchange resin product containing an alkylammonium ion as a counter ion and are insulated from each other, said polymeric actuator operating as an actuator by applying a potential difference between the metal

- 5 electrodes when the ion-exchange resin product is in the water-containing state to allow the ion-exchange resin product to undergo bending or deformation.

In the polymeric actuator of the invention, the counter ions of the ion-exchange resin product are
10 exchanged with specific alkylammonium ions, and thereby bubbles are hardly produced even under application of a high voltage, differently from the conventional ion-exchange resins whose counter ion is Na^+ or H^+ . In the polymeric actuator, further, water molecules
15 accompanying the ions generally migrate to an electrode to increase the water content in the vicinity of said electrode. As a result, this electrode side of the resin product is swollen and expanded, while the water content in the vicinity of the opposite electrode is
20 decreased to thereby contract the opposite electrode side of the resin product. Therefore, if the counter ions are exchanged with the alkylammonium ions, the difference in the water content between the electrodes becomes larger, and the degree of bending (deformation),
25 namely, degree of displacement, can be increased.

It is preferable that, as the alkylammonium ion, an alkylaluminum ion represented by the following formula (1) is contained. When such ions are contained, the difference in the water content between the electrodes becomes much larger, and the degree of bending (deformation), namely, degree of displacement, can be increased.

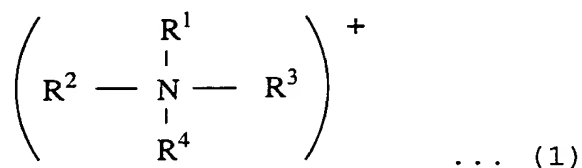

10


In the above formula, R^1 to R^4 may be the same or different and are each a hydrogen atom, a hydrocarbon group, an oxygen-containing hydrocarbon group or a nitrogen-containing hydrocarbon group, at least one of R^1 to R^4 is a group other than a hydrogen atom, and two or more of R^1 to R^4 may be bonded to form a ring.

In the polymeric actuator of the invention, it is more preferable that the alkylammonium ion is represented by the above formula (1), and it is particularly preferable that the alkylammonium ion is $CH_3N^+H_3$, $C_2H_5N^+H_3$, $(CH_3)_2N^+H_2$, $(C_2H_5)_2N^+H_2$, $(C_4H_9)_2N^+H_2$, $(C_5H_{11})_2N^+H_2$, $(CH_3)_3N^+H$, $(C_2H_5)_3N^+H$, $(C_4H_9)_3N^+H$, $(C_5H_{11})_3N^+H$, $(CH_3)_4N^+$, $(C_2H_5)_4N^+$, $(C_3H_7)_4N^+$, $(C_4H_9)_4N^+$, $H_3N^+(CH_2)_4N^+H_3$,

20

$\text{H}_2\text{C}=\text{CHCH}_2\text{N}^+\text{HCH}_3$, $\text{H}_3\text{N}^+(\text{CH}_2)_4\text{N}^+\text{H}_2(\text{CH}_2)_4\text{N}^+\text{H}_3$, $\text{HC}\equiv\text{CCH}_2\text{N}^+\text{H}_2$,
 $\text{CH}_3\text{CH}(\text{OH})\text{CH}_2\text{N}^+\text{H}_3$, $\text{H}_3\text{N}^+(\text{CH}_2)_5\text{OH}$, $\text{H}_3\text{N}^+\text{CH}(\text{CH}_2\text{OH})_2$,
 $(\text{HOCH}_2)_2\text{C}(\text{CH}_2\text{N}^+\text{H}_3)_2$, $\text{C}_2\text{H}_5\text{OCH}_2\text{CH}_2\text{N}^+\text{H}_3$,

5

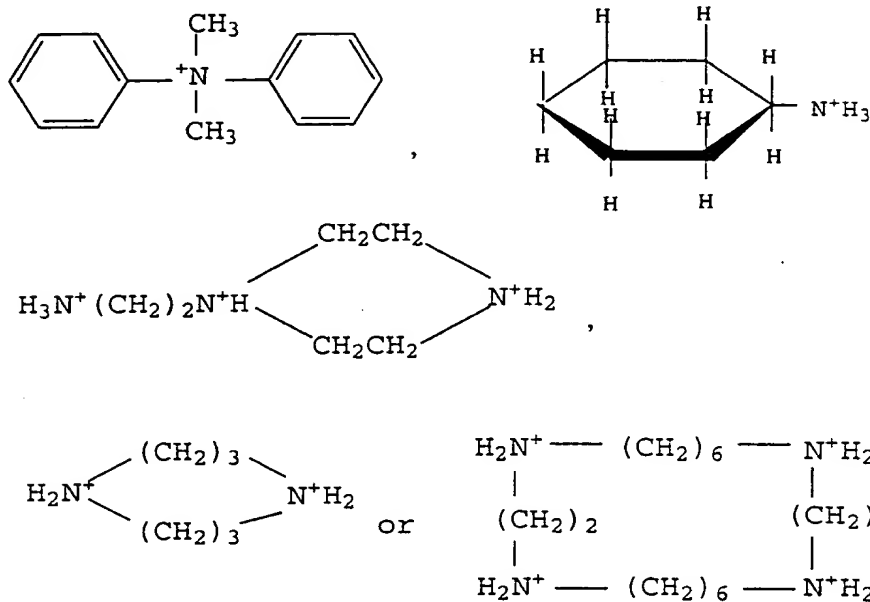

It is most preferable that the alkylammonium ion is
 $(\text{C}_4\text{H}_9)_3\text{N}^+\text{H}$, $(\text{C}_5\text{H}_{11})_3\text{N}^+\text{H}$, $(\text{C}_3\text{H}_7)_4\text{N}^+$ or $(\text{C}_4\text{H}_9)_4\text{N}^+$.

10

The polymeric actuator of the invention has a
 simple structure and can be easily miniaturized.

Further, even if voltage is increased, production of
 bubbles caused by electrolysis of water present in the
 resin product can be inhibited. Furthermore, the

15

polymeric actuator shows quick response and can generate
 large displacement.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic sectional view of a preferred embodiment of the polymeric actuator capable of applying the present invention, when no voltage is applied.

5 2A is a schematic sectional view showing a preferred relation between the thickness of an electrode and the thickness of a resin product.

10 Figs. 2B to 2D are each a schematic perspective view partially containing a section and showing the preferred relation between the thickness of an electrode and the thickness of a resin product in ^{other} ~~another~~ embodiments capable of applying the present invention.

Fig. 3 is a schematic sectional view showing the polymeric actuator of Fig. 1 when a voltage is applied.

15 Fig. 4 is a schematic view showing an embodiment of use application of the polymeric actuator.

Fig. 5 is a schematic sectional view for illustrating a movement of the actuator in the use application of Fig. 4.

20 Fig. 6 is a schematic view showing another embodiment of the polymeric actuator capable of applying the present invention.

Fig. 7 is a schematic view for illustrating a principle of measuring the degree of displacement in

25 Examples 1 to 21 and Comparative Examples 1 and 2.

09253638.021999
666T20"8992260

DETAILED DESCRIPTION OF THE INVENTION

The present invention is described below in detail with reference to the attached drawings.

5 The present invention relates to the improvements of a polymeric actuator comprising an ion-exchange resin product and metal electrodes which are formed on the surface of the ion-exchange resin product and are insulated from each other, said polymeric actuator
10 operating as an actuator by applying a potential difference between the metal electrodes when the ion-exchange resin product is in the water-containing state to allow the ion-exchange resin product to undergo bending or deformation, and a process for producing the
15 same.

First, with reference to Figs. 1 and 2A, a polymeric actuator capable of applying the present invention will be concretely described.

Fig. 1 is a schematic sectional view of an
20 embodiment of the polymeric actuator capable of applying the present invention. Fig. 2A is a schematic sectional view showing a preferred relation between the thickness of an electrode and the thickness of a resin product. As shown in Figs. 1 and 2A, the polymeric actuator 1 of
25 the embodiment comprises an ion-exchange resin product 2

in the form of a slender rectangular flat plate (or film) and electrodes 3a, 3b which are formed on the surfaces of the ion-exchange resin product, respectively, and are insulated from each other. This polymeric actuator 1 is so designed that the ion-exchange resin product is bent or deformed by applying a potential difference between the electrodes 3a, 3b when the ion-exchange resin product 2 is in the water-containing state.

As shown in Fig. 1, to the electrodes 3a, 3b, one ends of a pair of lead wires 4a, 4b are electrically connected, respectively, and the other ends of the lead wires 4a, 4b are connected to a power source 5.

The form of the ion-exchange resin product 2 is not limited to the rectangular flat plate or film, and the resin product may be in the form of a film, a column or, as shown in Figs. 2B to 2D or Fig. 6, a cylinder.

Examples of the ion-exchange resins for forming the ion-exchange resin product 2 include cation-exchange resins and amphoteric ion-exchange resins. Of these, the cation-exchange resins are preferably employed because they can increase the degree of displacement of the polymeric actuator.

The cation-exchange resins employable herein are, for example, those wherein functional groups such as

5 sulfonic acid group and carboxyl group are introduced into polyethylene, polystyrene or fluororesins. In particular, the cation-exchange resins wherein functional groups such as sulfonic acid group and carboxyl group are introduced into fluororesins are preferable.

10 It is desirable that the cation-exchange resin has an ion-exchange capacity of 0.8 to 3.0 meq/g, preferably 1.4 to 2.0 meq/g. When a cation-exchange resin having such ion-exchange capacity is employed, the degree of displacement of the polymeric actuator can be further increased.

15 In the present invention, examples of metals for constituting the electrodes 3a, 3b include gold, platinum, palladium, rhodium and ruthenium.

20 The thickness of the electrodes formed on the surface of the ion-exchange resin product can be optionally determined in accordance with the shapes or materials of the ion-exchange resin product and the electrodes, or positions at which the electrodes are formed.

25 For example, when the ion-exchange resin product used is in the form of a plate or a film as shown in Fig. 2A, the electrode provided on each surface of the ion-exchange resin product desirably has such a

thickness that the ratio of the thickness a_1 of the metal electrode formed on the ion-exchange resin product to the thickness b_1 of the ion-exchange resin product including the metal electrodes (a_1/b_1) is in the range of 0.03 to 0.40, preferably 0.15 to 0.30. If the a_1/b_1 ratio is in this range, a polymeric actuator capable of generating large displacement and having low surface resistance can be obtained.

In the present invention, when the ion-exchange resin product is in the form of a cylinder (Fig. 2B), the metal electrodes may be provided on the outer surface of the cylinder, the inner surface thereof (Fig. 2C) or both of the outer and the inner surfaces thereof (Fig. 2D). In such cases, the relation between the thicknesses of the ion-exchange resin product and electrode can be also optionally determined.

In case of the polymeric actuator 40 as shown in Fig. 2B in which the metal electrodes 43 are provided on the outer surface of the cylindrical ion-exchange resin product 41, the ratio of the thickness a_2 of the metal electrode 43 to the thickness b_2 of the cylindrical ion-exchange resin product 41 including the metal electrodes 43 (a_2/b_2) is desirably in the range of 0.02 to 0.70, preferably 0.30 to 0.50. If the a_2/b_2 ratio is in this range, a polymeric actuator capable of generating large

displacement and having low surface resistance can be obtained.

In case of the polymeric actuator 50 as shown in Fig. 2C in which the metal electrodes 55 are provided on the inner surface of the cylindrical ion-exchange resin product 51, the ratio of the thickness a_3 of the metal electrode 55 to the thickness b_3 of the cylindrical ion-exchange resin product 51 including the metal electrode 55 (a_3/b_3) is desirably in the range of 0.02 to 0.70, preferably 0.30 to 0.50. If the a_3/b_3 ratio is in this range, a polymeric actuator capable of generating large displacement and having low surface resistance can be obtained.

In case of the polymeric actuator 60 as shown in Fig. 2D in which the metal electrodes 63, 65 are provided on both of the outer and the inner surfaces of the cylindrical ion-exchange resin product 61, respectively, the ratio of the thickness C of the cylindrical ion-exchange resin product 61 excluding the metal electrodes 63, 65 to the thickness b_4 of the cylindrical ion-exchange resin product 61 including the metal electrodes 63, 65 (C/b_4) is desirably in the range of 0.20 to 0.95, preferably 0.45 to 0.70. Further, the ratio of the thickness a_4 of the metal electrode 63 provided on the outer surface of the cylindrical resin

complex and platinum complex, and particularly preferable is gold complex because the displacement generated by the polymeric actuator can be increased.

5 The adsorption of the metal complex on the ion-exchange resin product is carried out by immersing the ion-exchange resin product in an aqueous solution containing the metal complex. Prior to the formation of metal electrode, the ion-exchange resin product may be subjected to any of the following treatments. Each of
10 the treatments can be carried out singly or in combination.

(1) Water treatment

The ion-exchange resin product is boiled in hot water.

15 (2) Hydrochloric acid treatment

The ion-exchange resin product is held in dilute hydrochloric acid of about 25 vol %.

(3) NaOH treatment

20 The ion-exchange resin product is held in a sodium hydroxide aqueous solution of about 0.1N.

(4) Alcohol treatment

The ion-exchange resin product is immersed in an alcohol such as methanol or ethanol.

(5) Autoclave treatment

The ion-exchange resin product is heated at a temperature of 110 to 150 °C in an autoclave.

The reduction of the metal complex is carried out by immersing the ion-exchange resin product adsorbing the metal complex thereon in an aqueous solution containing a reducing agent.

As the reducing agent, sodium sulfite, hydrazine, potassium boron hydride or the like is employable, though the reducing agent used varies depending upon the type of the metal complex used. During the reduction of the metal complex, an acid or an alkali may be added if desired.

The above steps (i) to (iii) may be repeatedly conducted to form the metal electrodes on the surface of the ion-exchange resin product and further inside the resin product.

The number of cycles of the above steps is in the range of preferably 1 to 20, more preferably 4 to 9. The term "number of cycles" means the number of metal complex adsorption-reduction processes conducted on the metal film initially formed by allowing the ion-exchange resin product to adsorb a metal complex and then reducing the metal complex. The number of cycles is preferably utmost 20 because the effect of increasing

the degree of displacement is hardly exerted when the number of cycles is more than 20.

In the reduction of the metal complex adsorbed on the ion-exchange resin product, the metal complex is
5 contacted with the reducing agent to deposit a metal on the surface of the ion-exchange resin product.
Subsequently, the metal complex present inside the film moves to the vicinity of the film surface (toward the deposited metal) and is then reduced to deposit a metal.
10 That is, crystal growth of a metal proceeds from the surface of the ion-exchange resin product to the interior thereof. Therefore, deposition of the metal is conducted not only on the surface of the ion-exchange resin product but also in the interior near the surface.
15 As a result, the contact area between the ion-exchange resin product and the metal electrode becomes larger than that in the conventional chemical plating method. Accordingly, by the repetition of the adsorption-deposition process as in the present invention, the
20 metal deposition further proceeds inside the ion-exchange resin product, whereby the contact area between the ion-exchange resin product and the metal electrode is furthermore increased. With increase of the contact area, the number of electrode active spots is increased,
25 and the number of ions migrating to the electrode is

also increased. Hence, the difference in the water content between the electrodes becomes much larger, and as a result the degree of bending (deformation), namely, degree of displacement, is increased. Moreover, because
5 of the increased contact area between the ion-exchange resin product and the metal electrode, the surface resistance of the electrode is decreased to raise conductivity of the electrode, and the degree of displacement is increased.

10 When the metal electrodes are formed by further repeating the above steps (i) to (iii), the degree of displacement of the element can be made much larger than that of the conventional polymeric actuators.

Then, the ion-exchange resin product having metal
15 electrodes formed by the reduction of a metal complex is preferably subjected to a washing step to remove the unreacted metal complex and reducing agent.

Examples of the washing liquids preferably used include water, a sodium hydroxide aqueous solution, a
20 sulfuric acid aqueous solution and a hydrochloric acid aqueous solution. When these washing liquids are used, the unreacted metal complex and reducing agent can be efficiently removed. In the use of these washing liquids, it is preferred that the concentration of the
25 sodium hydroxide aqueous solution be in the range of


by irradiating the resin product having the metal electrode thereon with a laser beam to remove a part of the metal electrode and thereby provide insulating zones between the electrodes.

5 After the formation of the electrodes on the ion-exchange resin product, the resin product may be subjected to the aforesaid treatments (1) to (5).

On the thus formed electrodes, an additional electrode layer may be provided. The additional electrode layer can be formed by chemical plating, electroplating, vacuum deposition, sputtering, coating, press bonding, welding or the like. Material of the additional electrode layer may be the same as or different from those of the metal electrodes formed on the surface and the interior of the ion-exchange resin product. By the provision of the additional electrode layer, the displacement of the polymeric actuator can be further increased.




Because the polymeric actuator produced by the
20 process of the invention as described above can increase
the degree of ^{displacement} ~~replacement~~ by the above principle, the
counter ions of the ion-exchange resin product are not
particularly limited, and may be Na^+ or H^+ , or may be
alkylammonium ions as used in the polymeric actuator of
25 the present invention. However, in the polymeric

formula (1). It is also preferable that the alkylammonium ions are alkylammonium ions represented by the following formula (1).

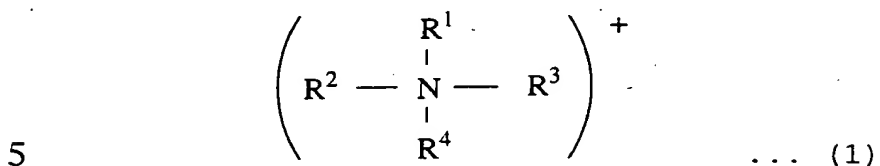

In the above formula, R^1 to R^4 may be the same or different and are each a hydrogen atom, a hydrocarbon group, an oxygen-containing hydrocarbon group or a
10 nitrogen-containing hydrocarbon group, at least one of R^1 to R^4 is a group other than a hydrogen atom, and two or more of R^1 to R^4 may be bonded to form a ring.

As the alkylammonium ions represented by the formula (1), preferable are $CH_3N^+H_3$, $C_2H_5N^+H_3$, $(CH_3)_2N^+H_2$,
15 $(C_2H_5)_2N^+H_2$, $(CH_3)_3N^+H$, $(C_2H_5)_3N^+H$, $(CH_3)_4N^+$, $(C_2H_5)_4N^+$,
 $(C_3H_7)_4N^+$, $(C_4H_9)_4N^+$, $H_3N^+(CH_2)_4N^+H_3$, $H_2C=CHCH_2N^+HCH_3$,
 $H_3N^+(CH_2)_4N^+H_2(CH_2)_4N^+H_3$, $HC\equiv CCH_2N^+H_2$, $CH_3CH(OH)CH_2N^+H_3$,
 $H_3N^+(CH_2)_5OH$, $H_3N^+CH(CH_2OH)_2$, $(HOCH_2)_2C(CH_2N^+H_3)_2$,
 $C_2H_5OCH_2CH_2N^+H_3$,

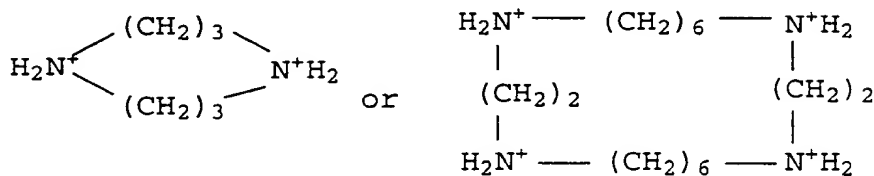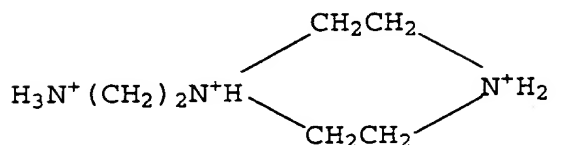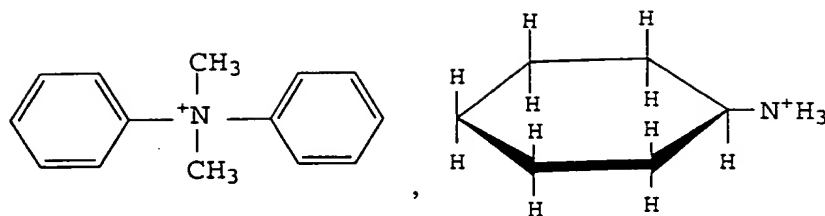

More preferable are (C₄H₉)₃N⁺H, (C₅H₁₁)₃N⁺H, (C₃H₇)₄N⁺ and (C₄H₉)₄N⁺. These alkylammonium ions may be used singly
 5 or in combination of two or more kinds.

In the polymeric actuator of the present invention, the process for forming the metal electrodes is not limited and, for example, can be formed by any conventional methods.

10 In order that the polymeric actuator of the invention and that prepared by the process of the work, the ion-exchange resin product is required to be in a water-containing state. The expression "water-
 containing state" used herein means that counter ions
 15 can immigrate corresponding to a potential difference

because the ion-exchange resin product contains water.
In the present invention, the polymeric actuator can
work even in water or in the atmosphere of high
humidity, with the proviso that it is in such water-
5 containing state.

Hereinafter, the working principle of the polymeric
actuator will be further described with referring to
Fig. 3.

That is, as shown in Fig. 3, when a potential
10 difference is applied to the surfaces of the ion-
exchange resin product 2 through the metal electrodes
3a, 3b insulated from each other, the positive ions 6
migrate to the cathode side (in Fig. 3, electrode 3a) in
the ion-exchange resin product 2, and the water
15 molecules accompanying the positive ions 6 also migrate
in the resin product 2. As a result, the water content
in the vicinity of the cathode (electrode 3a) is
increased to swell and expand the cathode side of the
resin product 2, while the water content in the vicinity
20 of the anode (opposite side, in Fig. 3, electrode 3b) is
decreased to contract the anode side of the resin
product 2. Thus, by virtue of the difference in the
water content between the electrodes 3a, 3b, the ion-
exchange resin product 2 is bent.

In the polymeric actuator of the invention, since the water molecules migrate together with the ions, and the ions having large ionic radius such as alkylammonium ions are used as the migrating ions, the difference in the water content between the electrodes is further increased, and, as a result, the degree of bending (deformation), namely, degree of displacement, is increased. That is, the polymeric actuator of the invention generates larger displacement of element as compared with the conventional polymeric actuators. In the polymeric actuator of the invention containing alkylammonium ions, further, water contained in the ion-exchange resin product is hardly electrolyzed even if a high voltage is applied, and therefore production of bubbles can be inhibited, differently from the conventional polymeric actuators wherein Na^+ or H^+ ions are contained. Hence, a higher voltage than that applied to the conventional polymeric actuators can be applied to the polymeric actuator of the invention, and hence the response of the polymeric actuator can be improved.

When a direct-current voltage of 0.1 to 3 V is applied between the electrodes of the polymeric actuator prepared by a process of the present invention, the polymeric actuator can obtain a displacement of about

0.5 to 3 times as large as the element within several seconds. While, when a direct-current voltage of 0.1 to 4 V is applied between the electrodes of the polymeric actuator of the invention, the polymeric actuator can
5 obtain a displacement of about 1 to 3 times the length of the element within several seconds. Further, the polymeric actuator can undergo flexible movement in water.

An embodiment of use application of the polymeric
10 actuators as described above is a guide shown in Figs. 4 and 5.

In this application, a guide wire 11 as the guide consists of a linear member 12 made of, for example, a slender synthetic resin tube or a slender stainless tube
15 and a polymeric actuator 13 joined to a tip of the linear member 12.

The actuator 13 comprises an ion-exchange resin product 14 in the form of a slender rectangular flat plate and a pair of electrodes 15a, 15b disposed on both
20 surfaces of the resin product, which can be formed by the method of the invention. By applying a voltage between the electrodes 15a, 15b, the polymeric actuator 13 is bent in two directions.

To the electrodes 15a, 15b, one ends of a pair of
25 lead wires 16a, 16b are electrically connected,

Thus, the polymeric actuator 13 can be arbitrarily and positively deformed by the switching operation between the anode and the cathode.

Another embodiment of use application of the
5 polymeric actuator as described above is a cylindrical polymeric actuator 40 shown in Fig. 6.

In the production of the cylindrical polymeric actuator according to the process of the invention, metal electrodes are formed in the following manner.
10 First, a metal complex is adsorbed on an ion-exchange resin product 41 and reduced by a reducing agent in accordance with the aforesaid method to deposit a metal on the surface of the ion-exchange resin product 41. The metal complex adsorption-reduction operation and the
15 metal deposition operation are repeated to grow the deposited metal, whereby a metal layer extending from the surface of the ion-exchange resin product 41 to the interior thereof is formed.

Then, the cylindrical ion-exchange resin product 41
20 provided with a metal layer on the outer surface is irradiated with a laser beam from a laser beam machine to remove the irradiated metal layer, whereby insulating zones 42 in the form of groove and metal electrodes 43a, 43b, 43c, 43d which are electrically insulated from each
25 other by the zones 42 are formed.

Such metal electrodes as mentioned above may be provided on the inner surface of the ion-exchange resin product, or may be provided on both of the inner and the
15 outer surfaces of the resin product.

a

a

electrodes, thereby to improve the conductivity thereof. Therefore, the polymeric actuator thus obtained is high in the degree of bending (deformation), namely, degree of displacement and exhibits quick response.

5 According to the process of the invention, therefore, a polymeric actuator having simple structure, capable of being miniaturized, showing quick response, generating large displacement and capable of working with low power can be obtained.

10 In the polymeric actuator of the invention, since the counter ion of the ion-exchange resin product is exchanged with a specific alkylammonium ion, the quantity of water molecules which migrate together with the alkylammonium ions by the application of the
15 potential difference is increased, whereby the difference in the water content between the electrodes becomes much larger, and even if a high voltage is applied between the electrodes of the polymeric actuator, electrolysis of water in the ion-exchange
20 resin product hardly takes place and production of bubbles is inhibited, differently from the generally used ion-exchange resins whose counter ion is Na^+ or H^+ . Accordingly, in the polymeric actuator of the invention, the degree of bending (deformation), namely, degree of
25 displacement, is increased, and a higher voltage than

that applied to the conventional polymeric actuators can be applied to the polymeric actuator of the invention, and hence the response can be quickened.

According to the invention, therefore, a polymeric actuator having simple structure, capable of being easily miniaturized, showing quick response, generating large displacement, capable of working with low power and free from occurrence of bubbles due to electrolysis of water even when a potential difference is increased in order to increase the ^{displacement}~~displacement~~ can be obtained.

If the polymeric actuator of the invention or the polymeric actuator obtained by the process of the invention is used as a guide means for surgical equipment for microsurgery, such as scissors, forceps, snare, laser knife and spatula, or microdevices such as various sensors and tools, the guidance can be improved because the polymeric actuator can be arbitrarily and positively bent (deformed) by the operation of the operation controller. As a result, the surgical equipment or the microdevices can be turned toward the desired place, and the turning operation can be rapidly and easily performed without skill.

If the polymeric actuator of the invention or the polymeric actuator of the invention is applied to surgical equipment such as tweezers, scissors, forceps,

EXAMPLE

The present invention is further described with reference to the following examples, but it should be construed that the invention is in no way limited to those examples.

In Examples and Comparative Examples, the measurement of the degree of displacement was carried out as follows: as shown in Fig. 7, at the position of 8 mm from one end of the specimen 101, the specimen was interposed between platinum plates, and the specimen 101 with the platinum plates was held in water. Lead wires 103a, 103b were extended from the platinum plates and connected to a potentiostat 105. A voltage was applied between the gold electrodes 107a, 107b on the both sides of the specimen 101. The degree of displacement was determined by measuring a displacement at the position of 10 mm from the fixed end by means of a laser displacement meter.

Example 1

A filmy fluororesin type ion-exchange resin product having a film thickness of 140 μm (ion-exchange capacity: 1.4 meq/g) was subjected to a surface roughening treatment with alumina particles of #800. Then, the ion-exchange resin product was subjected to

two cycles of the following steps (1) to (3) to form gold electrodes on the surfaces of the resin product.

(1) Adsorption step

The ion-exchange resin product is immersed in an aqueous solution of phenanthrine gold chloride for 24 hours to allow the resin product to adsorb a phenanthrine gold complex.

(2) Deposition step

In an aqueous solution containing sodium sulfite and NaOH, the adsorbed phenanthrine gold complex is reduced to form gold electrodes on the surfaces of the ion-exchange resin product. The reduction of the phenanthrine gold complex is carried out at an aqueous solution temperature of 60 to 80 °C for 6 hours with slowly adding sodium sulfite.

(3) Washing step

The ion-exchange resin product on the surfaces of which gold electrodes have been formed is taken out and washed with water at 70 °C for 1 hour.

The resulting ion-exchange resin product provided with gold electrodes was cut to give a specimen having a size of 1.0 mm × 20 mm, and the surface resistance of the specimen was measured. Then, a voltage (square wave of 0.1 Hz and 2.0 V) was applied to the specimen through

the electrodes on the front and back sides to measure the degree of displacement (bending).

The degree of displacement of the specimen was 2.0 mm, and the surface resistance of the specimen was 10 Ω .

5

Example 2

A specimen was prepared in the same manner as in Examples 1, except that the steps (1) to (3) were repeated 3 cycles. The specimen was evaluated in the same manner as in Example 13.

As a result, the degree of displacement of the specimen was 3.2 mm, and the surface resistance of the specimen was 5 Ω .

15

Example 3

A specimen was prepared in the same manner as in Examples 1, except that the steps (1) to (3) were repeated 4 cycles. The specimen was evaluated in the same manner as in Example 13.

20 As a result, the degree of displacement of the specimen was 3.7 mm, and the surface resistance of the specimen was 2 Ω .

Example 4

A specimen was prepared in the same manner as in Examples 1, except that the steps (1) to (3) were repeated 5 cycles. The specimen was evaluated in the same manner as in Example 13.

- 5 As a result, the degree of displacement of the specimen was 3.9 mm, and the surface resistance of the specimen was 1 Ω .

Example 5

- 10 A specimen was prepared in the same manner as in Examples 1, except that the steps (1) to (3) were repeated 6 cycles. The specimen was evaluated in the same manner as in Example 13.

- 15 As a result, the degree of displacement of the specimen was 4.2 mm, and the surface resistance of the specimen was 1 Ω .

Example 6

- 20 A specimen was prepared in the same manner as in Examples 1, except that the steps (1) to (3) were repeated 7 cycles. The specimen was evaluated in the same manner as in Example 13.

- 25 As a result, the degree of displacement of the specimen was 4.5 mm, and the surface resistance of the specimen was 0.5 Ω .

10

15

20

As a result, the degree of displacement of the specimen was 5.3 mm, and the surface resistance of the specimen was 0.5 Ω .

A specimen was prepared in the same manner as in Examples 1, except that the steps (1) to (3) were repeated 10 cycles. The specimen was evaluated in the same manner as in Example 13.

As a result, the degree of displacement of the specimen was 5.5 mm, and the surface resistance of the specimen was 0.5 Ω .

5 Comparative Example 1

A specimen was prepared in the same manner as in Examples 1, except the steps (1) to (3) were not repeated. The specimen was evaluated in the same manner as in Example 13.

10 As a result, the degree of displacement of the specimen was 2.0 mm, and the surface resistance of the specimen was 10 Ω .

It can be seen from the above results that, as the number of cycles of the steps (1) to (3) becomes larger, 15 a polymeric actuator exhibiting larger displacement and lower surface resistance can be obtained. It can be also seen that the effect on the degree of displacement and the surface resistance becomes greater especially when the number of cycles is 4 to 9.

20

Example 10

A rectangular ion-exchange resin product provided with gold electrodes (ion-exchange capacity: 1.8 meq/g) was cut into a size of 1.0 mm \times 20 mm and immersed in a 25 0.5M (C₂H₅)NH₃Cl aqueous solution for 24 hours to give a

specimen. Then, a voltage (square wave of 0.1 Hz and 1.5 V) was applied to the specimen through the electrodes on the front and back sides to measure the degree of displacement. Further, a voltage (square wave of 0.1 Hz) at which bubbles were produced was measured.

The results are set forth in Table 1.

Example 11

A rectangular ion-exchange resin product provided with gold electrodes (ion-exchange capacity: 1.8 meq/g) was cut into a size of 1.0 mm × 20 mm and immersed in a 0.5M (CH₃)₂NH₂Cl aqueous solution for 24 hours to give a specimen. Then, a voltage (square wave of 0.1 Hz and 1.5 V) was applied to the specimen through the electrodes on the front and back sides to measure the degree of displacement. Further, a voltage (square wave of 0.1 Hz) at which bubbles were produced was measured.

The results are set forth in Table 1.

Example 12

A rectangular ion-exchange resin product provided with gold electrodes (ion-exchange capacity: 1.8 meq/g) was cut into a size of 1.0 mm × 20 mm and immersed in a 0.5M (C₂H₅)₃NHCl aqueous solution for 24 hours to give a specimen. Then, a voltage (square wave of 0.1 Hz and

1.5 V) was applied to the specimen through the electrodes on the front and back sides to measure the degree of displacement. Further, a voltage (square wave of 0.1 Hz) at which bubbles were produced was measured.

5 The results are set forth in Table 1.

Example 13

666120" BE 9E5260
A rectangular ion-exchange resin product provided with gold electrodes (ion-exchange capacity: 1.8 meq/g) was cut into a size of 1.0 mm × 20 mm and immersed in a 0.5M (C₃H₇)₄NCl aqueous solution for 24 hours to give a specimen. Then, a voltage (square wave of 0.1 Hz and 1.5 V) was applied to the specimen through the electrodes on the front and back sides to measure the degree of displacement. Further, a voltage (square wave of 0.1 Hz) at which bubbles were produced was measured.

The results are set forth in Table 1.

Example 14

20 A rectangular ion-exchange resin product provided with gold electrodes (ion-exchange capacity: 1.8 meq/g) was cut into a size of 1.0 mm × 20 mm and immersed in a 0.5M (C₄H₉)₄NCl aqueous solution for 24 hours to give a specimen. Then, a voltage (square wave of 0.1 Hz and 25 1.5 V) was applied to the specimen through the

electrodes on the front and back sides to measure the degree of displacement. Further, a voltage (square wave of 0.1 Hz) at which bubbles were produced was measured.

The results are set forth in Table 1.


5

Example 15

A rectangular ion-exchange resin product provided with gold electrodes (ion-exchange capacity: 1.8 meq/g) was cut into a size of 1.0 mm × 20 mm and immersed in an aqueous solution (concentration: 0.5 M) of a chloride of an alkylammonium ion represented by the following formula for 24 hours to give a specimen. Then, a voltage (square wave of 0.1 Hz and 1.5 V) was applied to the specimen through the electrodes on the front and back sides to measure the degree of displacement. Further, a voltage (square wave of 0.1 Hz) at which bubbles were produced was measured.

10

15

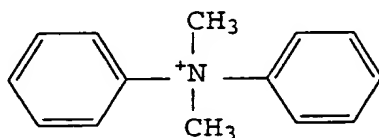


20

The results are set forth in Table 1.

Example 16

A rectangular ion-exchange resin product provided with gold electrodes (ion-exchange capacity: 1.8 meq/g) was cut into a size of 1.0 mm × 20 mm and immersed in an aqueous solution (concentration: 0.5 M) of a chloride of an alkylammonium ion represented by the following formula for 24 hours to give a specimen. Then, a voltage (square wave of 0.1 Hz and 1.5 V) was applied to the specimen through the electrodes on the front and back sides to measure the degree of displacement.

Further, a voltage (square wave of 0.1 Hz) at which bubbles were produced was measured.

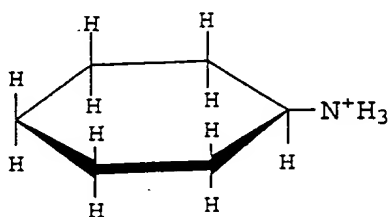


The results are set forth in Table 1.

Example 17

A rectangular ion-exchange resin product provided with gold electrodes (ion-exchange capacity: 1.8 meq/g) was cut into a size of 1.0 mm × 20 mm and immersed in an aqueous solution (concentration: 0.5 M) of a chloride of an alkylammonium ion represented by the following formula for 24 hours to give a specimen. Then, a

voltage (square wave of 0.1 Hz and 1.5 V) was applied to the specimen through the electrodes on the front and back sides to measure the degree of displacement.

Further, a voltage (square wave of 0.1 Hz) at which
5 bubbles were produced was measured.



The results are set forth in Table 1.

10 Example 18

A rectangular ion-exchange resin product provided with gold electrodes (ion-exchange capacity: 1.8 meq/g) was cut into a size of 1.0 mm × 20 mm and immersed in an aqueous solution (concentration: 0.5 M) of a chloride of
15 $\text{H}_2\text{C}=\text{CHCH}_2\text{N}^+\text{H}_2\text{CH}_3$ for 24 hours to give a specimen. Then, a voltage (square wave of 0.1 Hz and 1.5 V) was applied to the specimen through the electrodes on the front and back sides to measure the degree of displacement. Further, a voltage (square wave of 0.1 Hz) at which
20 bubbles were produced was measured.

The results are set forth in Table 1.

Example 19

666T20" BE9E3260

A rectangular ion-exchange resin product provided with gold electrodes (ion-exchange capacity: 1.8 meq/g) was cut into a size of 1.0 mm × 20 mm and immersed in an aqueous solution (concentration: 0.5 M) of a chloride of $\text{CH}_3\text{CH}(\text{OH})\text{CH}_2\text{N}^+\text{H}_3$ for 24 hours to give a specimen. Then, a voltage (square wave of 0.1 Hz and 1.5 V) was applied to the specimen through the electrodes on the front and back sides to measure the degree of displacement. Further, a voltage (square wave of 0.1 Hz) at which bubbles were produced was measured.

The results are set forth in Table 1.

Example 20

A rectangular ion-exchange resin product provided with gold electrodes (ion-exchange capacity: 1.8 meq/g) was cut into a size of 1.0 mm × 20 mm and immersed in an aqueous solution (concentration: 0.5 M) of a chloride of $\text{H}_3\text{N}^+\text{CH}(\text{CH}_2\text{OH})_2$ for 24 hours to give a specimen. Then, a voltage (square wave of 0.1 Hz and 1.5 V) was applied to the specimen through the electrodes on the front and back sides to measure the degree of displacement. Further, a voltage (square wave of 0.1 Hz) at which bubbles were produced was measured.

The results are set forth in Table 1.

Example 21

A rectangular ion-exchange resin product provided with gold electrodes (ion-exchange capacity: 1.8 meq/g) was cut into a size of 1.0 mm × 20 mm and immersed in an aqueous solution (concentration: 0.5 M) of a chloride of $C_2H_5OCH_2CH_2N^+H_3$ for 24 hours to give a specimen. Then, a voltage (square wave of 0.1 Hz and 1.5 V) was applied to the specimen through the electrodes on the front and back sides to measure the degree of displacement.

Further, a voltage (square wave of 0.1 Hz) at which bubbles were produced was measured.

The results are set forth in Table 1.

Comparative Example 2

A rectangular ion-exchange resin product provided with gold electrodes (ion-exchange capacity: 1.8 meq/g) was cut into a size of 1.0 mm × 20 mm and immersed in a 0.1N NaOH aqueous solution for 24 hours to give a specimen. Then, a voltage (square wave of 0.1 Hz and 1.5 V) was applied to the specimen through the electrodes on the front and back sides to measure the degree of displacement. Further, a voltage (square wave of 0.1 Hz) at which bubbles were produced was measured.

The results are set forth in Table 1.

Table 1

	Degree of displacement (mm)	Bubble production voltage (V)
Ex. 10	1.0	2.0
Ex. 11	2.0	2.0
Ex. 12	2.3	2.1
Ex. 13	3.0	2.5
Ex. 14	2.2	4.4
Ex. 15	2.0	4.0
Ex. 16	2.3	2.5
Ex. 17	2.2	2.0
Ex. 18	2.1	2.2
Ex. 19	2.3	2.3
Ex. 20	2.0	1.8
Ex. 21	2.3	2.0
Comp. Ex. 2	0.5	1.8

It can be seen from the above results that the

5 polymeric actuators wherein the counter ions of the ion-exchange resin were exchanged with the alkylammonium ions represented by the formula (1) exhibit larger displacement and higher voltage for bubble production than those of the conventional polymeric actuator of

10 Comp. Ex. 1 whose counter ion is Na^+ .